TEN RINGS®
see far & see clear

Ten Rings Technologies Co., Ltd.

+86 755 2941 3690

info@tenrings.cn

www.tenrings.cn

2 / F, Building 1, Phase 5, Fucheng Digital Innovation Industry Park, Fucheng Sub-district Office, Longhua District, Shenzhen City, Guangdong Province, China. P.C.: 518110

TEN RINGS®
see far & see clear



Shenzhen Ten Rings Optics Co., Ltd.

DIGITAL DAY & NIGHT VISION SCOPE

Show you a farther world clearly |



Table of Contents

Shenzhen Ten Rings Optics Co., Ltd.

01
ABOUT US

03
FRONT CLIP-ON
NV100LRF-4K

05
REAR CLIP-ON
TR-IR NV200

07
REAR CLIP-ON
TR-IR-LRF NV201

09
REAR CLIP-ON
NV200LRF-4K

11
STAND-ALONE
TR-IR NV500

13
STAND-ALONE
TR-IR-LRF NV501

15
STAND-ALONE
NV500-4K

17
STAND-ALONE
NV500LRF-4K

19
DIGITAL DAY & NIGHT RIFLESCOPE
NV700LRF-4K

21
IR FLASHLIGHT
FL001
FL002

About Us





Ten Rings Technologies Co., Ltd. (hereinafter referred to as "The company") was established in Shenzhen, China. The registered trademark is "Ten Rings". It is a private technology enterprise specializing in the design, research and development, production and sales of high-definition digital photoelectric products, infrared night vision and thermal imaging products.

The company always regards scientific and technological innovation as the driving force for enterprise development, has a R&D team with high-quality personnel and strong professional skills, and maintains in-depth exchanges and cooperation with well-known domestic and foreign customers to form a technology and product development center with industry characteristics. The company has modern production lines, automated production workshops, and automated plug-in workshops, with an annual output of nearly one million units. The products are exported to all over the world, involving digital night vision imaging products, photoelectric conversion products and other products, and the qualified rate of products is 100%.

All the products produced by the company have passed the authoritative, CE, FCC and ROHS certifications at home and abroad. The company has successfully passed the ISO9001:2015 international management system certification, and participates in professional exhibitions in this industry at home and abroad many times a year, which also provides diversified product choices for customers and professional players in the industry.

Relying on high-quality products, innovative market system, and perfect after-sales service, the company will continue to uphold the concept of "people-oriented, honest management, and win-win cooperation" in the future development, develop in exploration, improve in innovation, use modern science and technology and management methods, create high-quality products with excellent talents and high-quality services, and provide a win-win situation for the majority of cooperative enterprises!



COOPERATIVE CULTURE

A Management Team

There is a highly educated and high-quality core management team.
All the members have many years of practical experience in marketing, R&D, finance, production and administrative anagement.
They're dedicated, united, collaborative, mutual understanding & support, and strive for the same goal.

B Sales Team

There is an excellent sales team, each member has rich marketing experience and good professionalism.
They're dedicated, mutual assist & support and can provide the best service and support for domestic and foreign customers.

C R & D Team

There is a research and development team consisting of many energetic engineers.
All the members have professional knowledge and rich operational experience in the fields of high-definition digital optoelectronic and infrared night vision and thermal imaging. Based on the actual situation of market feedback, Ten Rings continuously improves product quality to meet the needs of market and technology in the process of development.



850NM & 940NM SWITCHABLE

NV100LRF-4K Front Clip-on

Digital Day & Night Vision Scope

The NV100LRF-4K features a 0.39'' OLED display and 4K ultra HD sensor, it delivers sharp imaging even in extreme low-light conditions (0.001lux sensitivity), while the 1~5x digital zoom allows for detailed target acquisition. The built-in dual-band IR illuminator (850nm & 940nm, switchable) ensures clear vision up to 350 meters in total darkness, making it ideal for tracking game or conducting covert surveillance. Its quick attach and detach design for effortless setup. The built-in WiFi functionality allows users to connect to the app via smartphones or tablets, improving interactivity. Suitable for outdoor adventures, hunting, etc.


Silent Button

Reticle Shape

Laser Range:1000m


IP67


3 Levels of IR Brightness


Playback


PIP


WiFi Connection


Record



Features:

- 1-5x digital zoom
- Ultra HD 4K sensor(3840 × 2160) with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max-up to 350 meters in a completely dark environment
- With infrared laser ranging function, the longest distance can reach up to 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by two pieces 18650 replaceable batteries, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light(850nm & 940nm, switchable)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Picture-in-picture: 2x, 4x, 6x
- Using advanced photosensitive processing technology which can automatically switch between day mode and night mode according to the light intensity
- Field of View: 10.8° × 9.6°
- Built-in WiFi, can be controlled remotely by the mobile phone (TenRings Shots APP)
- Supports max up to 128G external TF card

0.39 OLED Display

Provides deep blacks and high contrast for better viewing
Low Power Consumption——Saves energy and extends battery life















Technical Specifications

Model	NV100LRF-4K
Sensor(px, lux)	3840×2160(0.001)
Objective Lens(mm)	35
Magnification(x)	1-5x digital zoom
Focal Length	35mm , manual focus
Display	0.39''OLED, 1024x768
Field of View(H*V)	10.8°× 9.6°
Battery Type	Powered by two 18650 replaceable batteries, ≤ 8h(IR off)
IR Illuminator(m, nm)	350, 850 & 940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	237.8*82.5*83, 380



TR-IR NV200

Rear clip-on

Digital Day & Night Vision Scope

TR-IR NV200 adopts low illumination at night, Sony dynamic CMOS sensor, external IR illuminator, you can obtain excellent observation results both day and night. The novel structure patent design greatly improves the observation effect and observation experience, and the built-in infrared color filter greatly improves the observation effect of the equipment during the day, reduces the overexposure under natural light during the day, and restores more realistically.


Fast Start-up | Silent Button | Quick Assembly | Reticle Shape | IP67

Playback | WiFi Connection | Recoil Resistance | Record | 3 Levels of IR Brightness



Features:

- 2-10x (5x digital zoom) image magnification
- Full HD Sensor(1920x1080P)with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max up to 300 meters in a completely dark environment
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light(850nm/940nm, optional)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Field of View: 22° × 16°
- Built-in WiFi, can be controlled remotely by the mobile phone (TenRings Shots APP)
- Supports max up to 128G external TF card

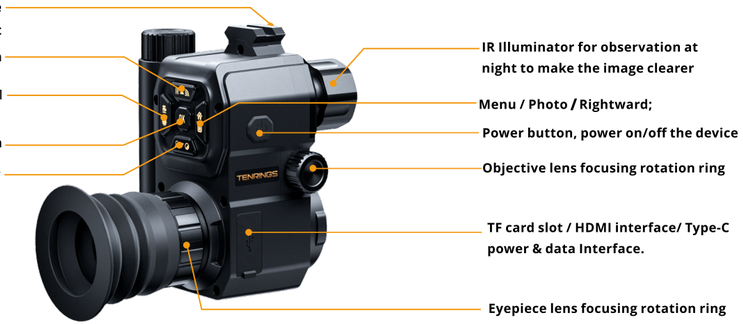

Technical Specifications

Model	TR-IR NV200
Sensor(px, lux)	1920×1080(0.001)
Objective Lens(mm)	16mm(fixed focus)
Magnification(x)	2~10 (5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	22°x 16°
Battery Type	Powered by one replaceable 18650 battery, ≤ 8h(IR off)
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
Operating Temperature(℃)	-25~50
Dimensions(mm)	143*82*113
Net Weight(g)	330

TR-IR-LRF NV201

Rear clip-on

Digital Day & Night Vision Scope

TR-IR-LRF NV201 is a rear clip-on model that uses a adapter to fix with optics scope, equipped with a detachable 905nm infrared rangefinder module, ensuring accurate testing of the target distance. The built-in WiFi module allows users to record and share videos, and it comes with a Type-C interface for external power supply and data copying at the same time. And it can be clipped on sniper scope to complete night hunting.





Fast Start-up | Silent Button | Quick Assembly | Reticle Shape | Laser Range:1000m | IP67

Playback | WiFi Connection | Recoil Resistance | Record | 3 Levels of IR Brightness



Features:

- 2-10x (5x digital zoom) image magnification
- Full HD Sensor(1920x1080P)with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max up to 300 meters in a completely dark environment
- With infrared laser ranging function, the farthest distance can reach up to 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Field of View: 22° × 16°
- Eyepiece Diopter adjustment to enable users with different eyesight to clearly see the text icons on the display
- Built-in WiFi, can be controlled remotely by the mobile phone (TenRings Shots APP)
- Supports max up to 128G external TF card

Model	TR-IR-LRF NV201
Sensor(px, lux)	1920×1080(0.001)
Objective Lens(mm)	16mm(fixed focus)
Magnification(x)	2~10 (5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	22°x 16°
Battery Type	Powered by one replaceable 18650 battery, ≤ 8h(IR off)
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	143*82*113
Net Weight(g)	360



NV200LRF-4K Rear clip-on

Digital Day & Night Vision Scope

The NV200LRF-4K represents a breakthrough in traditional night vision technology. This rear-mounted clip-on system seamlessly attaches to existing optics via adapter, preserving your scope's zero while adding 4K ultra-HD digital night vision capabilities. The advanced 4K sensor delivers exceptional image clarity with true-to-life color reproduction even in low-light conditions. In addition, it has advanced 3s fast start-up performance, which significantly improves the user's quick response ability. The high refresh rate design enables users to observe fast-moving target.

Silent Button | Quick Assembly | Reticle Shape | Laser Range:1000m | IP67

Playback | WiFi Connection | Recoil Resistance | Record | 3 Levels of IR Brightness




Features:

- 2-10x (5x digital zoom) image magnification
- Ultra HD 4K sensor(3840 × 2160) with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max up to 300 meters in a completely dark environment
- With infrared laser ranging function, the farthest distance can reach up to 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 3(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Field of View: 22° × 16°
- Eyepiece Diopter adjustment to enable users with different eyesight to clearly see the text icons on the display
- Built-in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)
- Supports max up to 128G external TF card



This series of devices boasts exceptional day and night observation capabilities thanks to its low illumination feature, dynamic Sony CMOS sensor, and external infrared Illuminator.

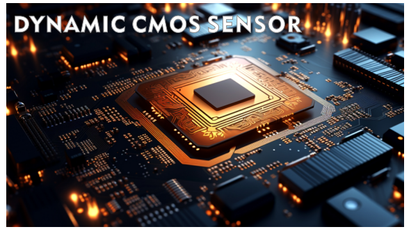



The built-in infrared color filter improves the equipment's observation effect during the day, reducing overexposure caused by natural light and providing more realistic imagery.

Technical Specifications

Model	NV200LRF-4K
Sensor(px, lux)	3840 × 2160, 0.001
Objective Lens(mm)	16mm(fixed focus)
Magnification(x)	2~10 (5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	22°x 16°
Battery Type	Powered by one replaceable 18650 battery, ≤ 3h(IR off)
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	143*82*113
Net Weight(g)	360



TR-IR NV500 Stand-alone

Digital Day & Night Vision Scope

TR-IR NV500 is designed with a 3.5-17.5x/5-25x(5x) digital rifle scope, it has advanced fast start-up performance, fast imaging in 3 seconds after booting, which significantly improves the user's quick response ability. The novel structure patent design greatly improves the observation effect and observation experience, and the built-in infrared color filter greatly improves the observation effect of the equipment during the day, reduces the overexposure under natural light during the day, and restores more realistically.

Fast Start-up | Silent Button | Quick Assembly | Reticle Shape | IP67 | 3 Levels of IR Brightness

Playback | PIP | WiFi Connection | Recoil Resistance | Record



Features:

- [3.5-17.5x/ 5-25x optional](5x digital zoom) image magnification
- Objective lens: 35/50mm(optional)
- Full HD Sensor(1920x1080P)with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max-up to 300 meters in a completely dark environment
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Picture-in-picture: 2x, 4x, 6x
- Using advanced photosensitive processing technology which can automatically switch between day mode and night mode according to the light intensity
- Field of View: 10.7° × 8.0°/8.2°x 6.2°
- Built-in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)
- Supports max up to 128G external TF card



Technical Specifications

Model	TR-IR NV500
Sensor(px, lux)	1920×1080(0.001)
Objective Lens(mm)	35/50
Magnification(x)	3.5~17.5 / 5~25(5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	10.7°x 8.0°/8.2°x 6.2°
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
Operating Temperature(℃)	-25~50
Dimensions(mm)	191*94*50
Net Weight(g)	525



TR-IR-LRF NV501

Stand-alone

Digital Day & Night Vision Scope

TR-IR-LRF NV501 series are designed with a 3.5-17.5x/5-25x(5x) digital rifle scope. It has advanced fast start-up performance, fast imaging in 3 seconds after booting, which significantly improves the user's quick response ability. Equipped with a detachable 905nm infrared rangefinder module, ensuring accurate testing of the target distance. The built-in WiFi module allows users to record and share videos, and it comes with a Type-C interface for external power supply and data copying at the same time.

Fast Start-up | Silent Button | Ballistic Calculator | Reticle Shape | Laser Range:1000m | IP67


Playback | PIP | WiFi Connection | Recoil Resistance | Record | 3 Levels of IR Brightness




Features:

- [3.5-17.5x/ 5-25x optional](5x digital zoom) image magnification
- Objective lens: 35/50mm(optional)
- Full HD Sensor(1920x1080P)with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max-up to 300 meters in a completely dark environment
- With infrared laser ranging function, the longest distance can reach up to 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Support ballistic calculator —configure parameters via the TenRings Shots APP for precision shooting
- Auto and Loop Video Recording; Audio Recording
- Playback
- Picture-in-picture: 2x, 4x, 6x
- Field of View: 10.7° × 8.0°/8.2°x 6.2°
- Built-in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)

BALLISTIC CALCULATOR

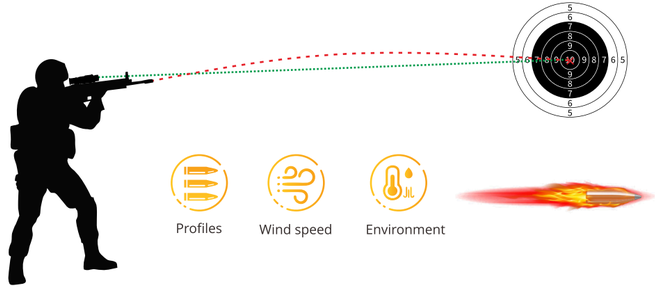

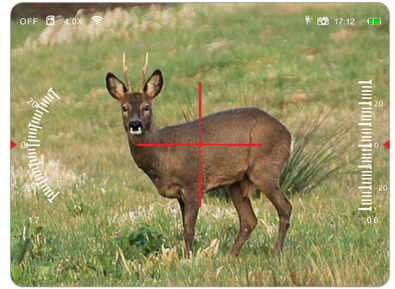

Technical Specifications

Model	TR-IR-LRF NV501
Sensor(px, lux)	1920×1080(0.001)
Objective Lens(mm)	35/50
Magnification(x)	3.5~17.5 / 5~25(5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	10.7°x 8.0°/8.2°x 6.2°
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	191*94*50
Net Weight(g)	560



NV500-4K Stand-alone

Digital Day & Night Vision Scope

NV500-4K series are designed with a 3.5-17.5x/5-25x(5x) digital rifle scope with 4K ultra-HD resolution, delivering exceptional clarity and detail for precision targeting. The novel structure patent design greatly improves the observation effect and observation experience, and the built-in infrared color filter greatly improves the observation effect of the equipment during the day, reduces the overexposure under natural light during the day, and restores more realistically.

Playback · Silent Button · Reticle Shape · IP67 · 3 Levels of IR Brightness

PIP · WiFi Connection · Recoil Resistance · Record



Features:

- [3.5-17.5x/ 5-25x optional](5x digital zoom) image magnification
- Objective lens: 35/50mm(optional)
- Ultra HD 4K sensor(3840 × 2160) with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max-up to 300 meters in a completely dark environment
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Auto and Loop Video Recording; Audio Recording
- Playback
- Picture-in-picture: 2x, 4x, 6x
- Using advanced photosensitive processing technology which can automatically switch between day mode and night mode according to the light intensity
- Field of View: 10.7° × 8.0°/8.2°x 6.2°
- Built-in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)
- Supports max up to 128G external TF card

ENJOY WIRELESS TRANSMISSION VIA WiFi CONNECTION

The built-in WiFi module allows users to record and share videos, and comes with a Type.c interface for external power supply and data copying at the same time.





Technical Specifications

Model	NV500-4K
Sensor(px, lux)	3840 × 2160, 0.001
Objective Lens(mm)	35/50
Magnification(x)	3.5~17.5 / 5~25(5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	10.7°x 8.0°/8.2°x 6.2°
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
Operating Temperature(℃)	-25~50
Dimensions(mm)	191*94*50
Net Weight(g)	525




Silent Button | Ballistic Calculator | Reticle Shape | Laser Range:1000m | IP67 | 3 Levels of IR Brightness

Playback | PIP | WiFi Connection | Recoil Resistance | Record



Features:

- [3.5-17.5x/ 5-25x optional](5x digital zoom) image magnification
- Objective lens: 35/50mm(optional)
- Ultra HD 4K sensor(3840 × 2160) with 0.001 lux sensitivity
- 1024 × 768 high-resolution OLED display
- The farthest observation distance max-up to 300 meters in a completely dark environment
- With infrared laser ranging function, the longest distance can reach 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Powered by one piece 18650 replaceable battery, ≤ 8h(IR off)
- Built-in IR-CUT two-color filter
- Built-in high-brightness, low-power dimmable laser infrared light (850nm/940nm, optional)
- Support ballistic calculator —configure parameters via the TenRings Shots APP for precision shooting
- Auto and Loop Video Recording; Audio Recording
- Playback
- Picture-in-picture enhancement: 2x, 4x, 6x
- Built-in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)

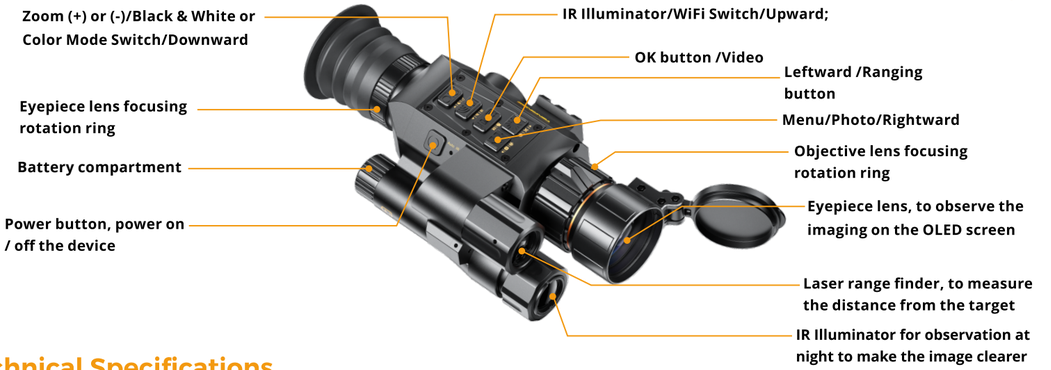

Technical Specifications

Model	NV500LRF-4K
Sensor(px, lux)	3840 × 2160, 0.001
Objective Lens(mm)	35/50
Magnification(x)	3.5~17.5 / 5~25(5x zoom)
Display	0.39''OLED, 1024x768
Field of View(H*V)	10.7°x 8.0°/8.2°x 6.2°
Eye Relief(mm)	50
IR Illuminator(m, nm)	300, 850/940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	191*94*50
Net Weight(g)	560



NV700LRF-4K
Hunting First Choice

Digital Day & Night Riflescope

The NV700LRF-4K, is equipped with a 4K CMOS sensor, offering stunning ultra-high-definition views with a 6x basal magnification and a 5x digital zoom. It features an integrated 1000m infrared laser rangefinder and a ballistic calculator, ensuring precise targeting and superior accuracy. Perfect for day and night use, the NV700LRF-4K redefines clarity and precision in the field.


Playback | Ballistic Calculator | Reticle Shape | IP67 | 3 Levels of IR Brightness

Recoil Activated Video | WiFi Connection | Recoil Resistance | PIP



Features:

- 6-30x(5x digital zoom) image magnification
- Ultra HD 4K sensor(3840 × 2160) with 0.001 lux sensitivity
- 1440 × 1080 high-resolution OLED display
- The farthest observation distance max-up to 500 meters in a completely dark environment
- With infrared laser ranging function, the longest distance can reach 1000m
- IP67 Waterproof & 6500J Recoil Resistance
- Built-in one piece 18650 battery and one replaceable 18650 battery, ≤ 8h
- Built-in IR-CUT two-color filter
- Support ballistic calculator —configure parameters via the TenRings Shots APP for precision shooting
- Auto and Loop Video Recording; Audio Recording
- Playback
- Switch between 24 reticle options (6 types & 4 colors) to match any scenario
- Eyepiece Diopter adjustment to enable users with different eyesight to clearly see the text icons on the display
- Built -in WiFi, can be controlled remotely by the mobile phone(TenRings Shots APP)
- Supports max up to 128G external TF card

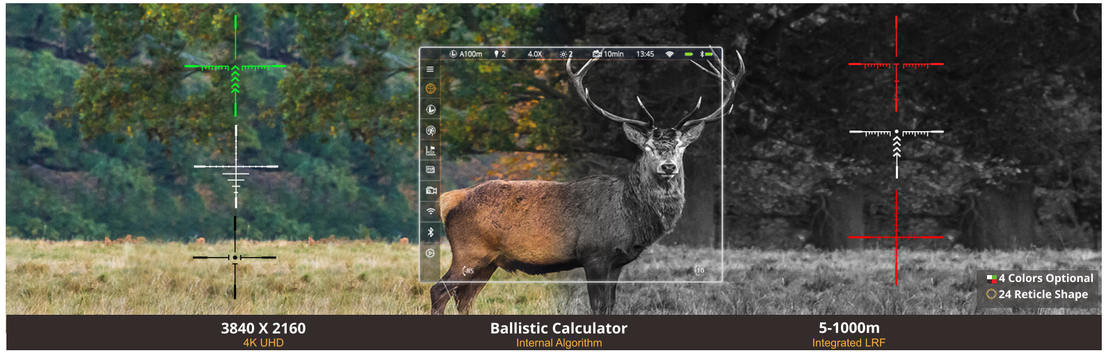

Technical Specifications

Model	NV700LRF-4K
Sensor(px, lux)	3840×2160(0.001)
Objective Lens(mm)	70
Magnification(x)	6-30x(5x zoom)
Focal Length	70mm (fixed focus), manual focus
Display	0.49''OLED, 1440x1080
Field of View(H*V)	6.25°× 3.53°
Battery Type	Built-in one piece 18650 battery and one replaceable 18650 battery, ≤ 8h
IR Illuminator(m, nm)	500, 850/940
LRF Range(m)	5-1000
Operating Temperature(℃)	-25~50
Dimensions(mm)	375.8*82.5*83, 680



FL001
IR Flashlight

IR Flashlight Night Vision Accessory

FI001 Flashlight is equipped with a VCSEL emitter and operates at wavelengths of 850nm, 940nm(optional), featuring 2 adjustable levels to enhance night vision in low-light or completely dark environments. Its highly compatible design allows it to be used independently or ideally paired with Ten Rings night vision devices. Providing wide-ranging illumination and clear long-distance images, it is an ideal companion for hunters, outdoor adventurers, and others engaged in highly night activities.

Product Model		FL001
IR Parameters	Emitter	VCSEL
	IR Walvelength(nm)	850 & 940
	IR Distance(m)	≤ 350
Power Supply	Voltage Range(V)	3.5-4.2
	Battery Type(mAh)	Powered by one replaceable 18650 battery
	Power Consumption	2W/3W/5W(Three levels)
	Battery Operating Time(h)	IR1 ≤ 6h, IR2 ≤ 3h, IR3 ≤ 2h
Mechanical Properties	Dimensions(L*W*H, mm)	152*28*28
	Material	Aluminium Alloy
	Net Weight(g)	≈120(without battery)
	Mounting	With Picatinny Rails
Working Environment	Operating Temperature(℃)	-20℃~50℃

Weight 120g

IP67

6500J Recoil Resistance

3 Levels of IR Brightness

Features:

- Adjustable Output: 2W/3W/5W power modes (350m max range in total darkness)
- 3-mode control (IR1/IR2/IR3) with runtime up to 6h/3h/2h
- Powered by one 18650 battery
- IP67 Waterproof & 6500J Recoil force
- Works with Ten Rings Night Vision Scopes
- Optional IR Wavelength—850nm/940nm
- Dimensions: 115mm*28mm
- Material: Aluminum Alloy



FL002
IR Flashlight

IR Flashlight Night Vision Accessory

FI002 Flashlight is equipped with a VCSEL emitter and operates at wavelengths of 850nm, 940nm(optional), featuring 2 adjustable levels to enhance night vision in low-light or completely dark environments. Its highly compatible design allows it to be used independently or ideally paired with Ten Rings night vision devices. Providing wide-ranging illumination and clear long-distance images, it is an ideal companion for hunters, outdoor adventurers, and others engaged in highly night activities.

Product Model		FL002
IR Parameters	Emitter	VCSEL
	IR Walvelength(nm)	850 & 940
	IR Distance(m)	≤ 350
Power Supply	Voltage Range(V)	3.5-4.2
	Battery Type(mAh)	Powered by one replaceable 18650 battery
	Power Consumption	2W/3W/5W(Three levels)
	Battery Operating Time(h)	IR1 ≤ 6h, IR2 ≤ 3h, IR3 ≤ 2h
Mechanical Properties	Dimensions(L*W*H, mm)	152*28*28
	Material	Aluminium Alloy
	Net Weight(g)	≈120(without battery)
	Mounting	With Picatinny Rails
Working Environment	Operating Temperature(℃)	-20℃~50℃

Weight 120g

IP67

6500J Recoil Resistance

3 Levels of IR Brightness

Features:

- Adjustable Output: 2W/3W/5W power modes (350m max range in total darkness)
- 3-mode control (IR1/IR2/IR3) with runtime up to 6h/3h/2h
- Powered by one 18650 battery
- IP67 Waterproof & 6500J Recoil force
- Works with Ten Rings Night Vision Scopes
- Switchable IR Wavelength—850nm&940nm
- Dimensions: 115mm*28mm
- Material: Aluminum Alloy

TenRings Shots APP

App Store

Google Play

Rapid connection

Connect phone to device via WiFi
Enjoy rocket speed.

Capture the moments

Easily control your device to
record or take photos

File Management

Preview, edit, download. Embrace
worry-free administration

